


BEDDING DETAIL

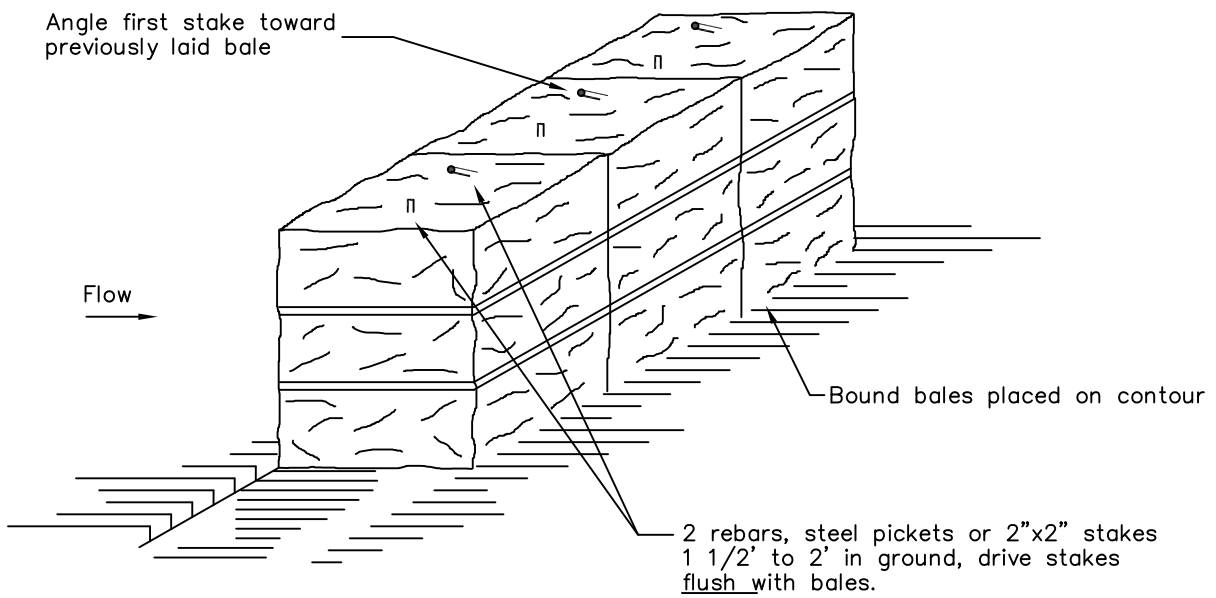

ANCHORING DETAIL

CONSTRUCTION SPECIFICATIONS

1. Bales shall be placed at the toe of a slope or on the contour and in a row with ends tightly abutting the adjacent bales.
2. Each bale shall be embedded in the soil a minimum of 4 inches (4") and placed so the bindings are horizontal.
3. Bales shall be securely anchored in place by either two (2) stakes or rebars driven through the bale. The first stake in each bale shall be driven toward the previously laid bale at an angle to force the bales together. Stakes shall be driven flush with the bale.
4. Inspection shall be frequent and repair replacement shall be made promptly as needed.
5. Bales shall be removed when they have served their usefulness so as not to block or impede storm flow or damage.



CITY OF COEUR D'ALENE STANDARD DRAWING

STRAW BALE DIKE

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

10/1/24
DATE:

DWG NO.

M-30